QUARTER WINDOW GLASS
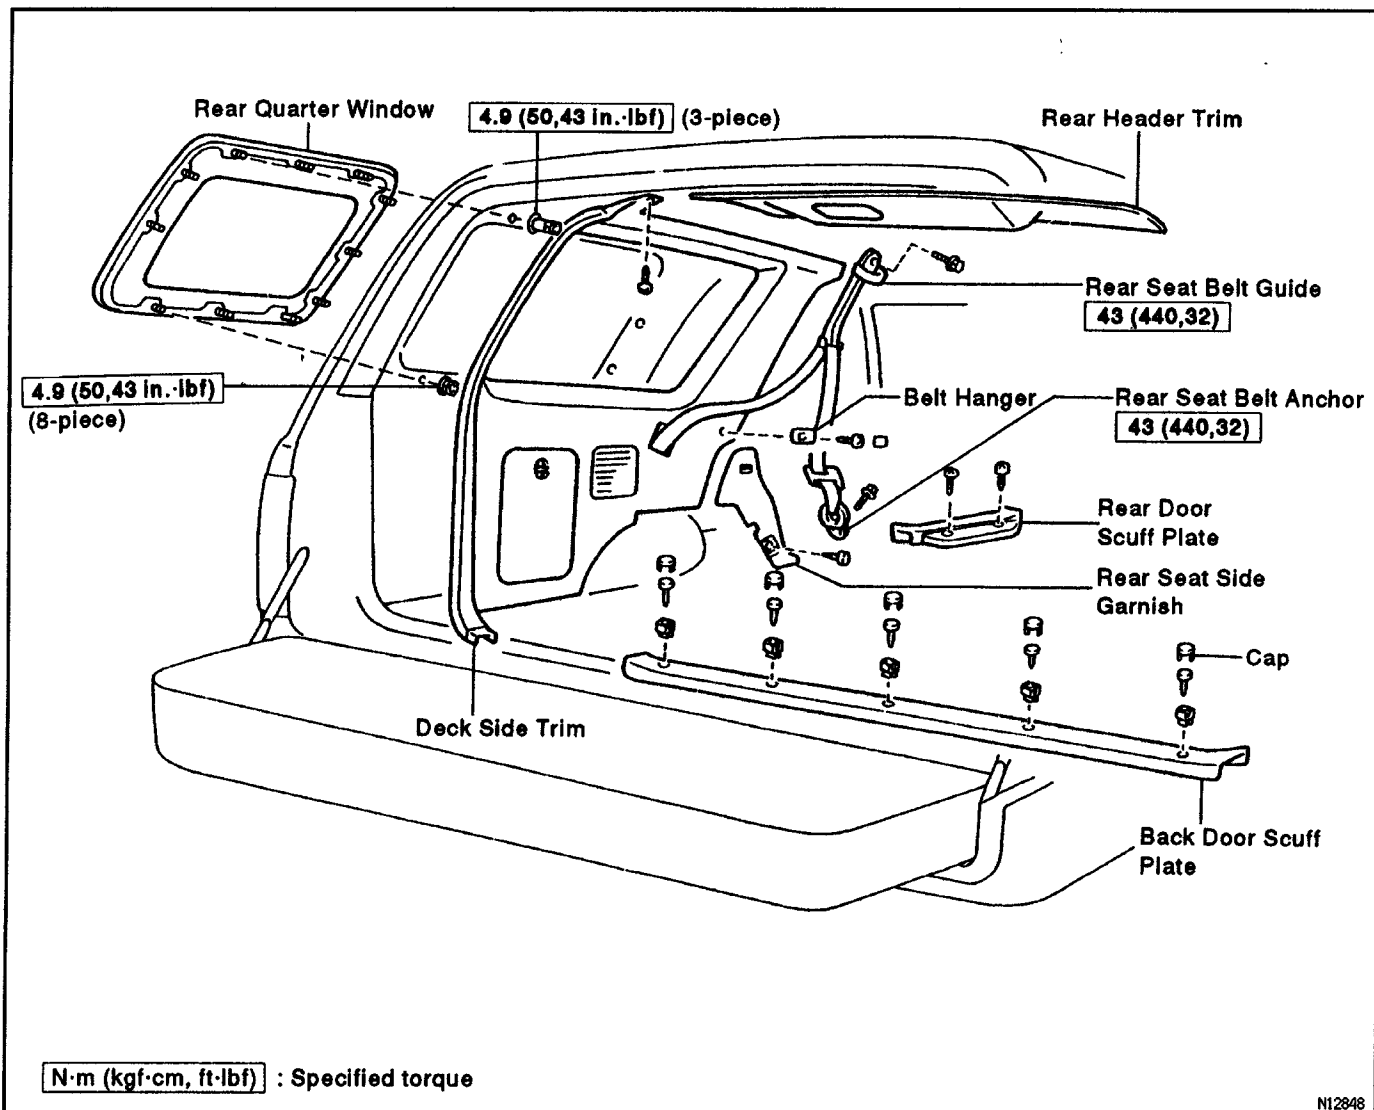## COMPONENTS

Rear Quarter Window

4.9 (50,43 in.·lbf) (3-piece)

Rear Header Trim

Rear Seat Belt Guide
43 (440,32)

4.9 (50,43 in.·lbf)
(8-piece)

Belt Hanger

Rear Seat Belt Anchor
43 (440,32)

Rear Door
Scuff Plate

Rear Seat Side
Garnish

Cap

Deck Side Trim

Back Door Scuff
Plate

N·m (kgf·cm, ft·lbf) : Specified torque

N12848

N02934
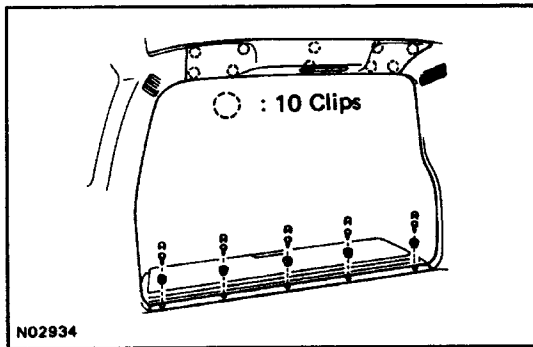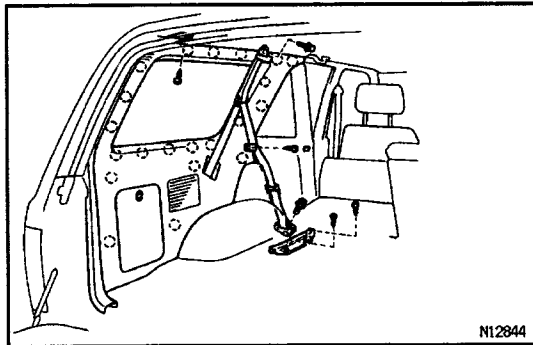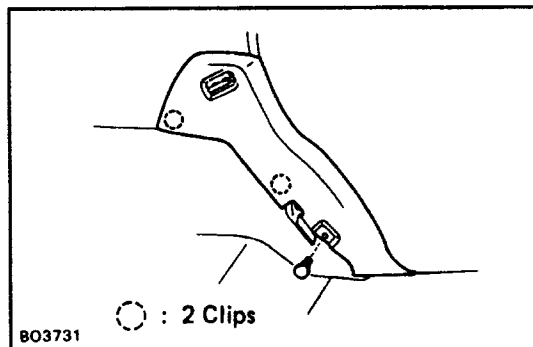
REAR QUARTER WINDOW REMOVAL

1. REMOVE REAR HEADER TRIM AND BACK DOOR SCUFF PLATE

    (a) Remove the rear header trim and the connector.

    (b) Remove the 5 caps, screws and the back door scuff plate.
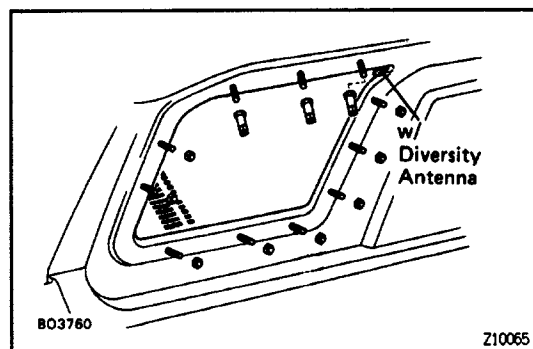

N12844

2. REMOVE DECK SIDE TRIM

    (a) Remove the screw with the deck side trim.

    (b) Remove the 2 bolts, the rear seat belt anchor and the belt guide.

    (c) Remove the screw and the belt hanger.

    (d) Remove the 2 screws and the rear door scuff plate.

◯ : 2 Clips

BO3731

    (d) Remove the clip and the rear seat side garnish.

    (e) Remove the screw and the deck side trim.
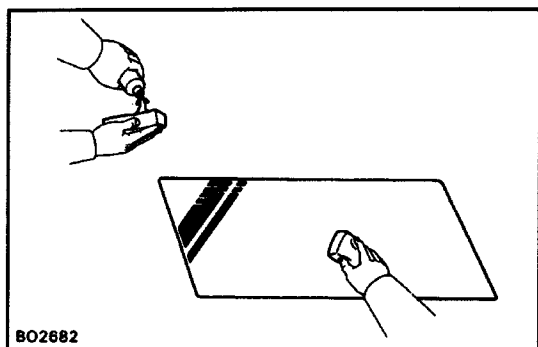

BO3760

Z10065

3. REMOVE REAR QUARTER WINDOW

    (a) w/ Diversity Antenna:

        Disconnect the connector.

    (b) Remove the 11 nuts.

    (c) Using a knife, cut loose a sealer between the glass and the body panel.
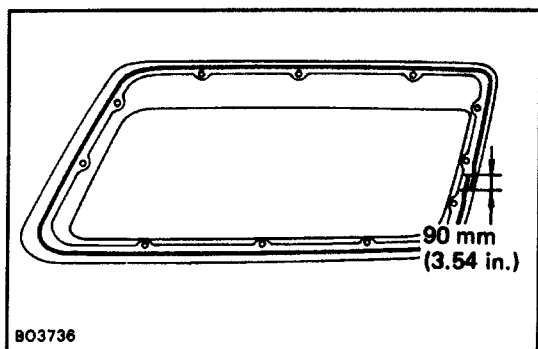
NOTICE: Do not damage the body and the glass.

REAR QUARTER WINDOW INSTALLATION
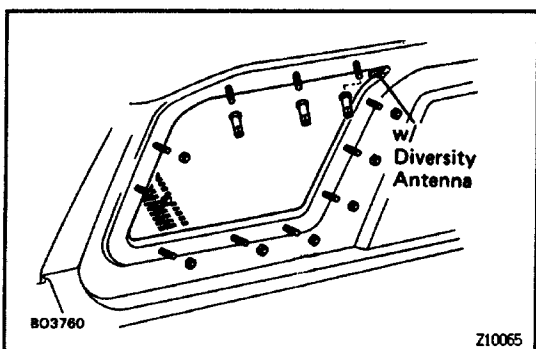## 1. PREPARE ITEMS LISTED

2. CLEAN BODY AND GLASS
Wipe off any adhesive left on the body and glass with cleaner.

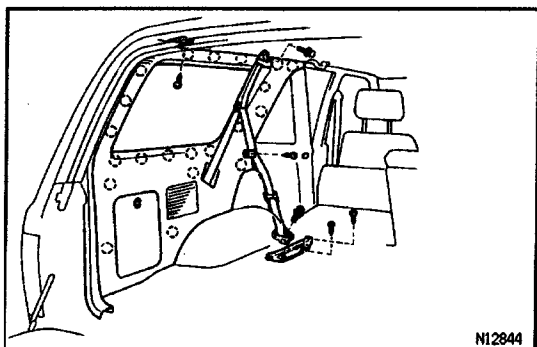### 3. INSTALL REAR QUARTER WINDOW
(a) Install the butyl tape to the glass.

(b) Place the bolts of retainers into the body holes.
(c) Tap the glass by hand.
(d) Install the 11 nuts.
Torque: 4.9 N–m (50 kgf–cm, 43 in.–lbf)
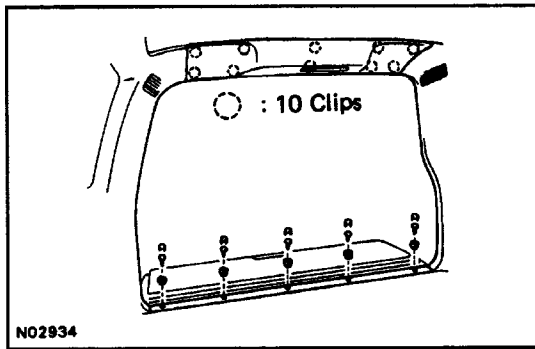**NOTICE: Do not exceed the specified torque.**
(e) w/Diversity Antenna:
   Connect the connectors.

4. INSTALL DECK SIDE TRIM
(a) Install the deck side trim with the screw.
(b) Install the rear seat side garnish with the clip.
(c) Install the rear door scuff plate with the 2 screws.
(d) Install the belt hanger with the screw.
(e) Install the rear seat belt guide and the belt anchor with the 2 bolts.
Torque: 43 N–m (440 kgf–cm, 32 ft–lbf)

◯ : 10 Clips

N02934

5. INSTALL REAR HEADER TRIM AND BACK DOOR SCUFF PLATE

(a) Connect the connector.

(b) Install the rear header trim.

(c) Install the back door scuff plate with the 5 screws.

(d) Install the 5 caps.