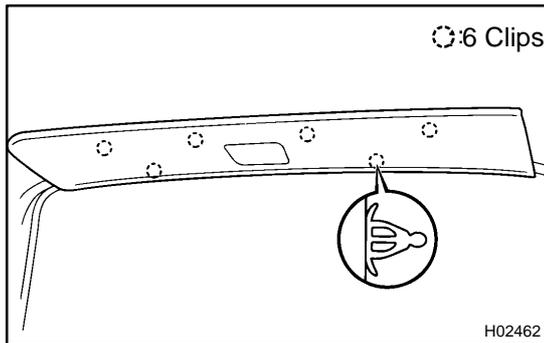


REMOVAL**1. REMOVE NO. 2 ROOM LIGHT**

- (a) Remove the room light cover, 4 screws and No. 2 room light.
- (b) Disconnect the connector.

**2. REMOVE REAR HEADER TRIM**

Using a screwdriver, remove the rear header trim.

HINT:


Tape the screwdriver tip before use.

3. REMOVE BACK DOOR SCUFF PLATE

Remove the 5 screws and back door scuff plate.

4. REMOVE REAR DOOR SCUFF PLATE


Remove the 2 screws and rear door scuff plate.

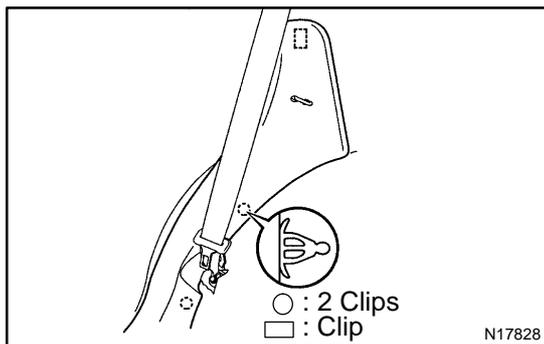**5. REMOVE REAR SEAT SIDE GARNISH**

Using a screwdriver, remove the rear seat side garnish.

HINT:

Tape the screwdriver tip before use.

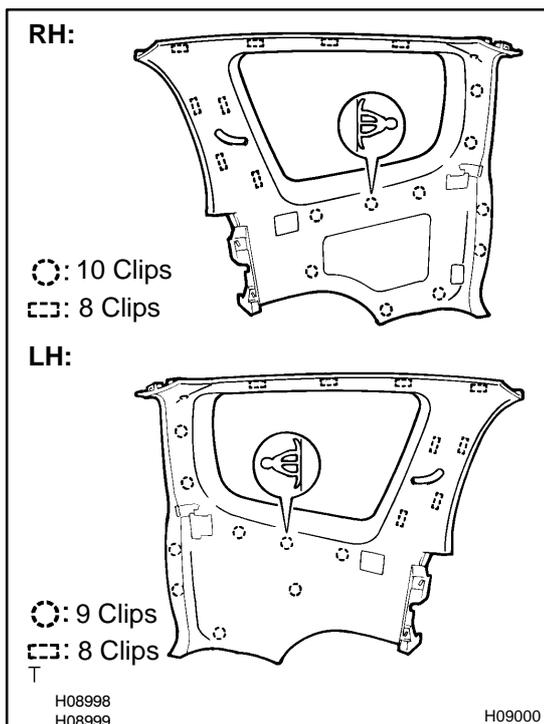**6. REMOVE DECK SIDE TRIM**

- (a) RH:

Using a screwdriver, remove the D/C outlet bezel, then disconnect the connector.

HINT:

Tape the screwdriver tip before use.

- (b) w/ Tonneau cover:

Remove the tonneau cover.

- (c) w/ Tonneau cover:

Remove the 2 screws and tonneau cover holder.

- (d) w/ Tonneau cover:

Remove the screw and tonneau cover hook.

- (e) Remove the screw.

- (f) Remove the rear No. 1 seat outer belt floor anchor.


- (g) Remove the rear No. 2 seat outer belt.

- (h) Insert a screwdriver between the trim and door panel to remove the trim, then disconnect the connector.

HINT:

Tape the screwdriver tip before use.

- (i) Remove the deck side trim with the rear No. 1 and No. 2 seat belts passed through its hole.

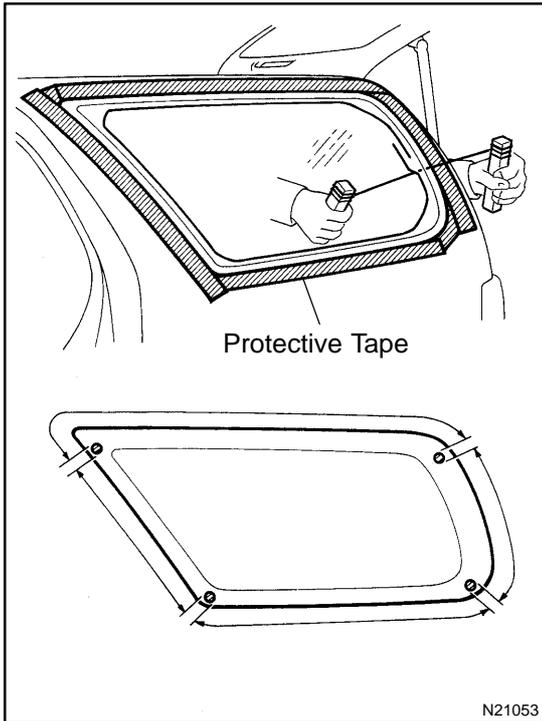

7. REMOVE QUARTER WINDOW GLASS

- (a) w/ Diversity antenna:
Disconnect the connector.
- (b) Push piano wire through between body and glass from the interior.
- (c) Tie both wire ends to a wooden block or similar object.

HINT:

Apply protective tape to the outer surface to keep the surface from being scratched.

NOTICE:

When separating the glass, take care not to damage the paint and exterior.

- (d) Cut the adhesive by pulling the piano wire around it.

HINT:

Cut the adhesive as shown in the illustration, leaving the adhesive where the pins are.



- (e) Push the piano wire through as shown in the illustration, cut off the adhered parts to the clip.
- (f) Remove the glass.

NOTICE:

Leave as much of the adhesive on the body as possible when cutting off the glass.